
IP-S-PDU5-2DI-SENSOR	Digital input (2x for door contact) gateway sensor
IP-S-PDU5-T-SENSOR	Temperature sensor
IP-S-PDU5-IO-SENSOR	Digital Input (4x) and output (2x) gateway sensor
IP-S-PDU5-TH-SENSOR	Temperature / humidity sensor



Digital input (2 x) sensor o 2x RJ45 connector o 1x USB-C (with single screw lock) o 2x digital input (connector 4 pins) o Non-isolating (contact closure), Ground switching (Internal Pull-Up) o Dual color status Led	Temperature Sensor o 2x RJ45 connector o 1x USB-C (with single screw lock) o Dual color status Led
Digital input (4x) output (2x) sensor	Temperature & Humidity Sensor
o 2x RJ45 connector	o 2x RJ45 connector
o 1x USB-C (with single screw lock)	o 1x USB-C (with single screw lock)
	_ , ,
o 4x digital input (connector 8 pins)	o Dual color status Led
o 4x digital input (connector 8 pins) o Non-isolating (contact closure), Ground switching	o Dual color status Led
	o Dual color status Led
o Non-isolating (contact closure), Ground switching	o Dual color status Led

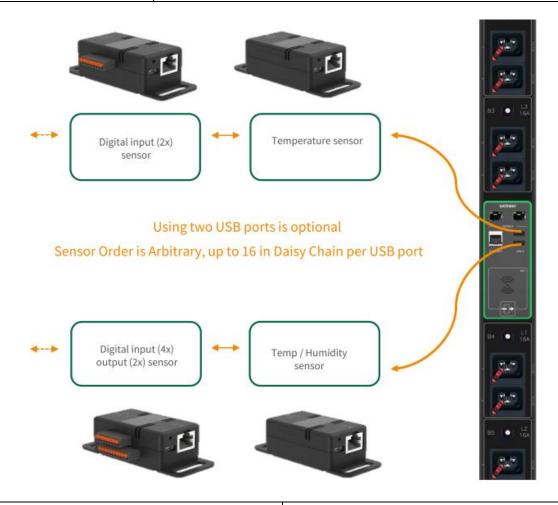