

IP-S PDU outlet options

IP-Sxx-xxx C3 xxxxx	C13 international standard IEC 320 C13 (10A/230V)
IP-Sxx-xxx C9 xxxxx	C19 international standard IEC 320 C19 (16A/230V)

IEC320 C13



IEC320 C19



Outlets C13 and C19 provide locking capability only with V-plugs. V-plug cables are orderable separately..

IP-C-C3C4-V12	Power cord C13-C14 with V-lock retaining, cable length 1.2m, black
IP-C-C9C2-V10	Power cord C19-C20 with V-lock retaining, cable length 1.0m, black



IP-S PDU outlet options

IP-Sxx-xxx D3 xxxxx	C13 international standard IEC 320 C13 with IEC lock (10A/230V)
IP-Sxx-xxx D9 xxxxx	C19 international standard IEC 320 C19 with IEC lock (16A/230V)

IEC320 C13 with IEC-lock



IEC320 C19 with IEC-lock




Outlets C13 and C19 provide locking capability with any standard cables.




IP-S PDU outlet options

IP-Sxx-xxx CX xxxxx	CX ... IEC Lock CX (C13_C15_C19_C21)	(13A/16A/230V)
IP-Sxx-xxx UK xxxxx	UK ... British Standard BS 1363	(13A/230V)
IP-Sxx-xxx SH xxxxx	SH ... German Schuko, CEE 7/3	(16A/230V)
IP-Sxx-xxx UT xxxxx	UT ... French Schuko, CEE 7/5, UTE	(16A/230V)

IEC Lock CX (C13_C15_C19_C21)

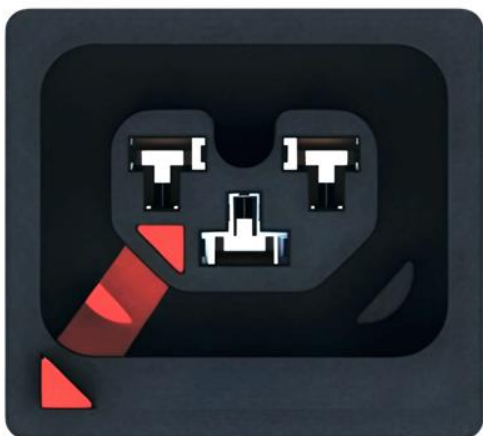

UK ... BS 1363

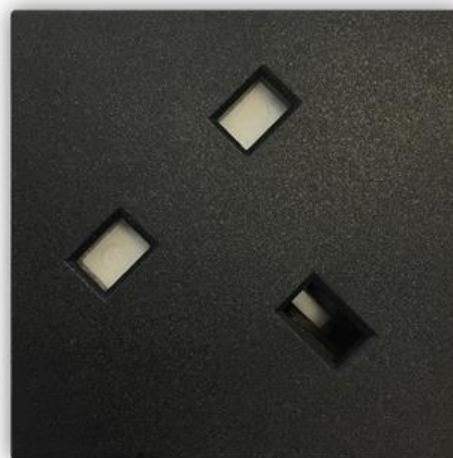

SH ... German Schuko, CEE 7/3



UT ... French Schuko, CEE 7/5, UTE

